

M100SOD

Dimmable LED AC Magnetic Transformer

Transformer


Input leads are 20 AWG. Output leads are 14 AWG. Lead insulation is 105 °C. The transformer uses a class B 130 °C insulation system.

Enclosure

Enclosure temperature will not exceed 70 °C @ 40 °C ambient. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors. The removable cover for the wiring compartment is secured in place by a screw. The enclosure is black powder coated.

General

- Manual reset thermal circuit breaker on the secondary side.
- Controlled with a low-voltage dimmer.
- UL listed file # E300404
- UL standard 5085-1
- ETL listed
- CSA listed
- NEMA 3R enclosure

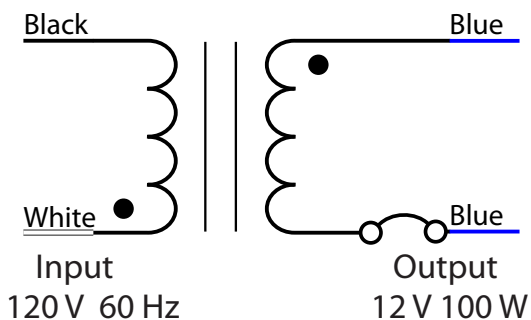

Dimensions in inches:

Length 6.06"
Width 2.59"
Depth 2.20"

Max Load	100 W
Input Voltage	120 V 60 Hz
Output Voltage Full Load	11.5 V
Input Current Full Load	838 mA
Open Circuit Volts	12.5 V
Open Circuit Current	95 mA
Output Current Full Load	8.24 A
Efficiency	92.30%
Coil Former	Double Section Bobbin
Thermal Class	B 130 °C
Leads Primary	PVC 600 V #20
Leads Secondary	PVC 300 V #14

