

## M250SOD

### Indoor & Outdoor Magnetic Lighting Transformer



#### Transformer


Input leads are 18 AWG. Output leads are 12 AWG. Lead insulation is 105 °C. The transformer uses a class B 130 °C insulation system.

#### Enclosure

Enclosure temperature will not exceed 70 °C @ 40 °C ambient. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors. The removable cover for the wiring compartment is secured in place by clips. The enclosure is black powder coated.

#### General

- Manual reset thermal circuit breaker on the secondary side.
- Dimmable with all dimmers that provide a symmetrical form of current wave under any conditions.
- UL listed file # E300404
- UL standard 5085-1
- ETL listed
- CSA listed
- NEMA 3R enclosure

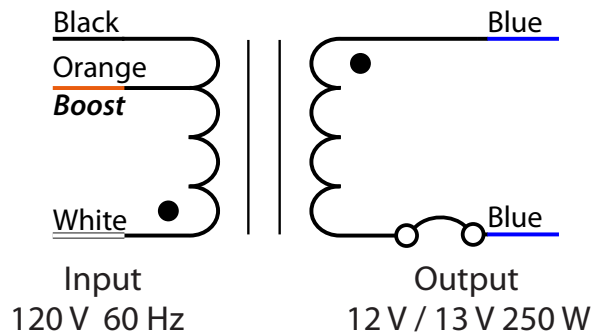

Max Load	250 W
Input Voltage	120 V 60 Hz
Output Voltage Full Load	11.5 V min. 12.5 V min. Boost
Input Current Full Load	2.1 A
Open Circuit Volts	12.5 V / 13.5 V Boost
Open Circuit Current	0.4 A
Output Current Full Load	21 A max
Efficiency	92%
Coil Former	Double Section Bobbin
Thermal Class	B 130 °C
Leads Primary	PVC 600 V #18
Leads Secondary	PVC 300 V #12

Dimensions in inches:  
 Height 9.17"  
 Width 4.19"  
 Depth 3.38"

