

20W LED Driver




Outdoor & Indoor Magnetic Class 2 LED Driver

Product Code: M20L24DC-277

Magnitude's M20L24DC-277 LED Driver is the perfect choice for use in hospitals, schools, and shopping malls or for any commercial application that 277V is present. The Drivers are encased in a high-quality NEMA 3R enclosure that includes 2 knock-outs to enable easy installation. It is equipped with a push to reset breaker on the output for load protection.

Features

- Push-to-reset breaker
- ETL listed
- Certified to CSA Standard
- Class 2
- Commercial Use
- flicker-free
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

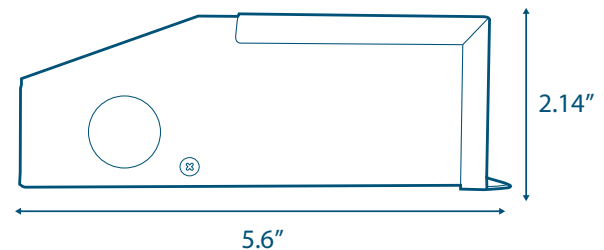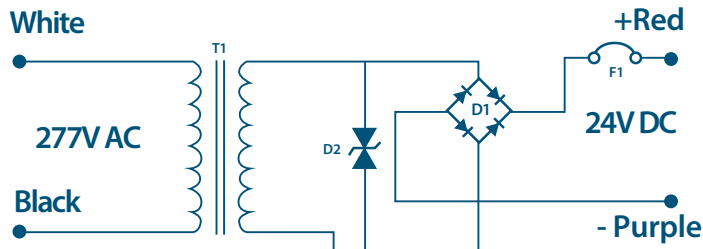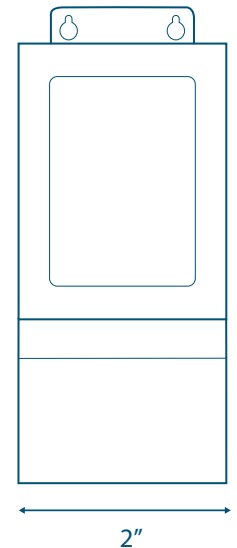

Specifications

Max Load	20W
Input Voltage	277V AC
Input Current Full Load	0.27 A
Output Voltage Full Load	22V DC
Max Output Current Full Load	0.97 A
Open Circuit Output Voltage	23.1V DC
Efficiency on I	78.4%
Power Factor on I	0.92
Coil Former	Double Section Bobbin
Max. Ambient Temperature	-30°C to 45°C
Min. Installation Space Between Drivers	5" Inch
Thermal Class	B130°C
Leads Primary	PVC 600V #20
Leads Secondary	PVC 300V #16
Circuit Breaker	secondary manual push-to-reset
Dimensions L*W*H	5.6 in. x 2 in. x 2.14 in. (142.2mm x 50.8 mm x 54.3 mm)
Weight	35 Oz.

The specifications are subject to change without notice